



# Actinic BL TL(-K) / TL-D(-K)

## Actinic BL TL 11W/10

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

### **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

| General Information             |               |   |
|---------------------------------|---------------|---|
| Cap-Base                        | G5            | - |
| Useful Life (Nom)               | 2,000 hour(s) |   |
|                                 |               |   |
| Light Technical                 |               |   |
| Color Code                      | 10            |   |
| Color Designation               | Actinic       |   |
| Chromaticity Coordinate X (Nom) | 230           |   |
| Chromaticity Coordinate Y (Nom) | 230           |   |
| UV Depreciation at 1000 h       | 40 %          |   |
| UV Depreciation at 2000 h       | 45 %          |   |
| UV Depreciation at 500 h        | 30 %          |   |

| Operating and Electrical   |         |  |
|----------------------------|---------|--|
| Power Consumption          | 11.5 W  |  |
| Lamp Current (Nom)         | 0.400 A |  |
| Voltage (Nom)              | 34 V    |  |
|                            |         |  |
| Mechanical and Housing     |         |  |
| Bulb Shape                 | T16     |  |
|                            |         |  |
| Approval and Application   |         |  |
| Mercury (Hg) Content (Nom) | 4.4 mg  |  |

Datasheet, 2024, July 16 data subject to change

# Actinic BL TL(-K) / TL-D(-K)

| UV                         |                      |
|----------------------------|----------------------|
| UV-A Radiation 100Hr (IEC) | 2.0 W                |
|                            |                      |
| Product Data               |                      |
| Order product name         | Actinic BL TL 11W/10 |
| Full product name          | Actinic BL TL 11W/10 |
| Full product code          | 871150095145827      |
| Order code                 | 928000601030         |


| Material Nr. (12NC)             | 928000601030  |
|---------------------------------|---------------|
| Numerator - Quantity Per Pack   | 1             |
| Net Weight (Piece)              | 21.000 g      |
| EAN/UPC - Product/Case          | 8711500951458 |
| Numerator - Packs per outer box | 250           |
| EAN/UPC - Case                  | 8711500951472 |
|                                 |               |

### Dimensional drawing

| <b>al</b> | / <u>/</u> |   |
|-----------|------------|---|
|           | В          | - |
|           | С          |   |



### Photometric data

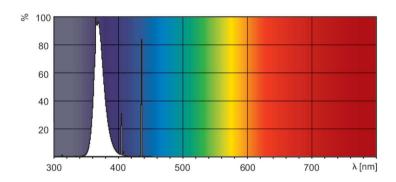

Spectral Power Distribution Colour - Actinic BL TL 11W/10



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.