



# MASTER - LED HID SON-T



## MAS LED SON-T IF 9Klm 50W 740 E40

Philips MASTER - LED HID SON-T lamps are an easy LED solution with a short payback period to replace High-Intensity Discharge (HID) and High-Pressure Sodium (SON) lamps. MASTER – LED HID SON-T solutions bring the energy efficiency and long lifetime benefits of LED to HID replacement, providing instant savings for a low initial investment. With the right lamp size and light distribution, you can easily retrofit MASTER – LED HID SON-T lamps into existing SON and SON-T systems, enhancing the lighting quality with LED without changing the luminaire’s ballast (for IF replacements) or reflector.

### Warnings and Safety

- Please refer to the installation guide or consult a Philips Lighting representative for the wiring diagram and instructions.

### Product data

General Information		Color rendering index (CRI)	
Cap-Base	E40		70
Nominal lifetime	70,000 hour(s)	LLMF At End Of Nominal Lifetime (Nom)	70 %
Switching Cycle	50,000	Photobiological safety according to EN 62471	RG1
Lighting Technology	LED	Operating and Electrical	
Flux measurement reference	Sphere	Line Frequency	50 Hz
		Input Frequency	50 Hz
		Power Consumption	50 W
		Lamp Current (Nom)	1,060 mA
		Starting Time (Nom)	0.5 s
		Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	-
		Voltage (Nom)	85-95 V
		Inrush current at mains	-
Light Technical			
Color Code	740 [CCT of 4000K]		
Luminous Flux	9,000 lm		
Luminous Efficacy (rated) (Nom)	180 lm/W		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4000 K		
Color Consistency	<6		

# MASTER - LED HID SON-T

Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	6
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	9
Max. lamp no. on MCB B type 16A - Mains	-
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	10
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	15
Ballast Compatibility	EM

## Temperature

Ambient temperature range	-30 to +45 °C
T-Case Maximum (Nom)	52 °C


## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	T70

## Dimensional drawing



## Approval and Application

Energy Efficiency Class	C
Energy Consumption kWh/1000 h	50 kWh
EPREL Registration Number	1077806
EU RoHS compliant	Yes



## Product Data

Order product name	MAS LED SON-T IF 9Klm 50W 740 E40
Full product name	MAS LED SON-T IF 9Klm 50W 740 E40
Full product code	871951444897100
Order code	929003467512
Material Nr. (12NC)	929003467512
Numerator - Quantity Per Pack	1
Net Weight (Piece)	0.490 kg
EAN/UPC - Product/Case	8719514448971
Numerator - Packs per outer box	6
EAN/UPC - Case	8719514448988

Product	D	C
MAS LED SON-T IF 9Klm 50W 740 E40	71 mm	262 mm


# MASTER - LED SON-T

## Photometric data




Light Distribution Diagram - MAS LED SON-T IF 9Klm 50W 740 E40

General uniform lighting - MAS LED SON-T IF 9Klm 50W 740 E40

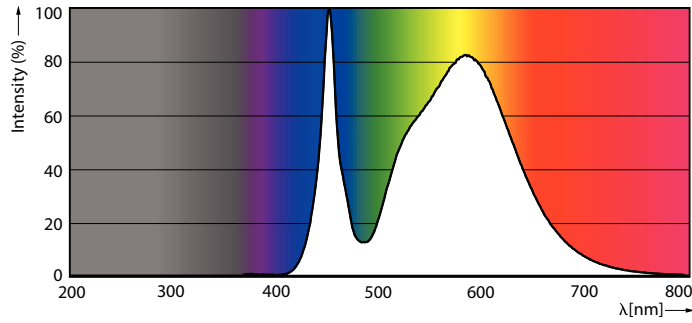


Spectral Power Distribution Colour - MAS LED SON-T IF 9Klm 50W 740 E40

## Lifetime

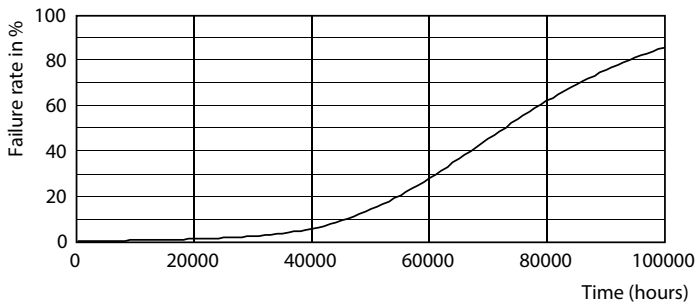

Life Expectancy Diagram

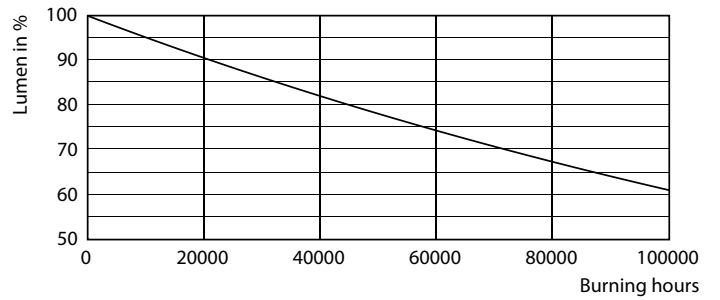

Lumen Maintenance Diagram - MAS LED SON-T IF 9Klm 50W 740 E40

# MASTER - LED HID SON-T

